

## TAU3

### Three-phase transformer winding analyser



- Three-phase switched source and measurement for:
  - Turns ratio
    - Up to 62.5 V,  $\pm 0.10$  % accuracy
  - Winding resistance
    - Up to 10 A,  $\pm 0.2$  % accuracy
  - Adaptive demagnetization
  - Unique transformer vector validation
- Accuracy guaranteed from  $-20$  °C to  $50$  °C
- Save time and protect operators with efficient one-time lead connection for all tests

#### 康高特-MEGGER TAU3变压器绕组分析仪 DESCRIPTION

Power through transformer electromechanical tests with the new TAU3, the three-phase transformer winding analyser. Perform polarity validation, turns ratio, winding resistance, and demagnetization tests with the same one-time lead connection. Guided by color-coded leads and extendable clamps with on-screen vectors that match the transformer nameplate, the easy to follow setup ensures the right result the first time - just click start!

Combined AC and DC output offers numerous benefits for today's demanding schedules:

- No lead changes = faster, safer with more time for testing
- Auto vector confirmation before every test, including winding resistance, ensures that the proper transformer vector is selected

#### 康高特-MEGGER TAU3变压器绕组分析仪 STANDARD FEATURES

- Microsoft Excel export
- PowerDB import and export
- 10.1 in Hi-bright touch screen
- Find vector, polarity recognition and validation
- TTR, Up to 62.5 V AC,  $\pm 0.10$  % accuracy
- Excitation current
- Winding resistance, up to 10 A DC,  $\pm 0.2$  % resistance accuracy

- Independent dual winding magnetization
- Adaptive demagnetisation
- Magnetic balance
- OLTC make before break continuity testing
- OLTC control with breaker protection
- One-touch OLTC for AC and DC tests
- Built in retractable handle and wheels
- Emergency stop
- Key lock
- Safety interlock

#### 康高特-MEGGER TAU3变压器绕组分析仪 ADDITIONAL FEATURES

- Dynamic resistance measurements\*
- Winding resistance dry out\*
- Winding resistance heat run\*
- USB printer
- Safety beacon
- OLTC motor current monitor\*
- OLTC vibration monitor\*
- External temperature probe\*

## TAU3

### Three-phase transformer winding analyser

#### PROBLEMS TYPICALLY FOUND WITH THE TAU3

- Loose connections
- Turn-to-turn shorts
- Broken strands
- Winding deformation
- Tap changer contact problems
- Core problems

The TAU3 has been designed with a diagnostic mode, where the operator can focus on problem phases and unique tests for pinpointing and confirming where issues exist in the asset.

#### DETAILED DESCRIPTION

The TAU3 is designed to test all power, instrument (CTs and PT/VTs), and distribution transformers. With minimal input from the user, the TAU3 uses patent pending step up excitation to deliver the required AC/DC voltage and current to obtain accurate results.

A single ladder climb and one-time lead connection reduces time spent on top of transformers. Once connected to the transformer, a key lock, safety interlock, and an emergency stop ensure testing starts and stops safely.

Shock-mounted electronics are housed in a compact, wheeled, and water tight case that's up to 50 % lighter/smaller than other multifunction electromechanical test solutions.

#### Find vector / polarity recognition

Find vector provides confidence in transformer results by performing vector group discovery and validation before every test. Windings such as zigzag, can be mistakenly seen as a delta, so the operator is required to validate the intended winding to be measured. Failure to do so could have catastrophic consequences when system voltage energises the transformer.

#### TTR - Turns ratio testing

When the TAU3 detects an issue with a phase, a diagnostic mode allows pinpointing of issues where traditional ratio instruments fail to operate/test.

#### Excitation current

Included with turns ratio testing, the excitation current test is extremely useful in locating problems such as defects in magnetic core balance, magnetic core structure, shifting of windings, failures in the turn-to-turn insulation, or problems in tap changers.

#### Phase angle deviation

Phase angle deviation (not to be confused with phase shift) is the phase relationship between in-phase vectors of the high side versus the low side windings. Phase deviation denotes the quality of the core and the winding, and when functioning properly should exhibit very low values ( $< 0.1^\circ$ ). Shorted or partial shorted turns and/or a deteriorated or damaged core can cause significant changes in the phase deviation values.

#### Magnetic balance

Magnetic balance assess the health of the windings, core assembly condition, and flux distribution within the transformer. This test, performed safely and efficiently by the TAU3, is a measure of how well balanced (electrically) the transformer is versus nameplate specifications.

#### Winding resistance

Efficiently test winding resistance with three-phase dual winding DC output of the TAU3. 100 VDC open circuit voltage quickly saturates the transformer core as independent current sources for H and X channels deliver stable and accurate measurements for each winding under test. No lead changes are required to switch from phase to phase - select auto save and the TAU3 does all the work. If one phase is out of limits, the user interface simplifies investigation by highlighting the problem phase and guiding the user through the results validation process.

#### Automatic adaptive demagnetization

Adaptive demagnetization removes remanence (magnetization) that remains after winding resistance tests are complete. The TAU3 avoids costly nuisance trips of protection equipment with automatic demagnetization performed after each winding resistance test.

#### OLTC make before break continuity

When performing winding resistance tests across multiple OLTC taps, make before break testing automatically verifies continuity of the tap changer connections. This first level diagnostic mode is useful in determining when dynamic resistance measurements are appropriate for further investigation.

#### One-touch OLTC

Save time testing with One-touch OLTC. Connect to the transformer OLTC with the included cables and run through an entire OLTC with one click. One-touch OLTC is available for both AC and DC, providing maximum test efficiency.

## TAU3

### Three-phase transformer winding analyser

#### SOFTWARE, SAVING, AND PRINTING RESULTS

Minimise training time with the intuitive 10.1 in user interface of the TAU3. Large, self-explanatory buttons guide operation, while on-screen vectors provide reassurance that the transformer nameplate matches the test setup. When exported, results are grouped by file name, producing an XLSX/PDF report that is easy to read, email, or import into PowerDB. When needed, the optional USB printer can print results on demand.

When you connect the TAU3 to your PC, not only can you control the device, but a USB drive will appear. The user manual, data sheet, and TAU3 PC application installer can be found on this drive so you always have the necessary documentation and applications on hand.

#### PowerDB control\*

If you're looking to step up your reporting, use PowerDB to configure and execute your tests. With PowerDB you can produce consistent test reports from all of your Megger instruments.

#### Custom application control

With custom app control, any program can control the TAU3 through the API. Great for organisations looking to push their test program to the limit! Non-disclosure agreement required for access to the API.

#### Dynamic resistance measurements (DRM)\*


Dynamic resistance measurements are an advanced diagnostic test for on-load tap changers. Pinpoint issues in on-load tap changers with individual resistor values and vibration and motor current profiles.

#### Heat run – internal temperature\*

Winding resistance cool down is an advanced diagnostic tool to determine the maximum temperature of a winding immediately after removal from full power.

#### Dry out – internal temperature\*

A transformer may need to go through a dry out process before going into service. This dry out process requires the internal temperature to remain steady for a set amount of time. Provide a reference temperature and resistance, and the TAU3 will report the temperature of the winding.

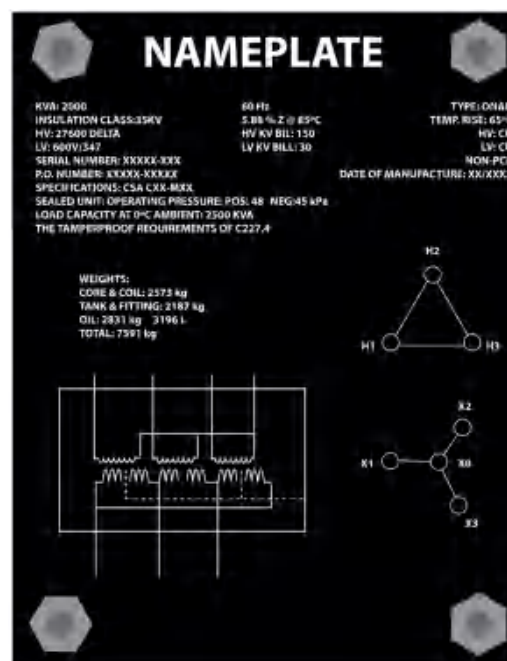

Compare nameplate vector to images on screen

## TAU3

### Three-phase transformer winding analyser

#### UNIVERSAL LEAD SET

The three-phase universal lead set simplifies connecting to any transformer. The durable kelvin clamps extend up to 3 in for connecting to any bushing size. Lead spans range from 5 m (15 ft) to 30 m (100 ft), ensuring secure connection and test capabilities for all transformer shapes and sizes. Connecting all leads in one ladder climb greatly reduces the risk of fall injuries and test time. Existing customers are able to use legacy lead sets with the TAU3. See the tables to the right for details.

The kelvin clamps also accept safety banana plugs, simplifying connection to a CT terminal block. Clearly displayed electrical shock and potential markings on the clamp inform operators how to connect safely and securely.

H leads PNs that can be used with any TAU3 model

2008-001-XXX  
2008-002-XXX  
2008-003-XXX  
2008-004-XXX

X lead PNs that can be used with TAU3-BASIC and TAU3-ADV

2008-005-XXX  
2008-006-XXX  
2008-007-XXX  
2008-008-XXX

XXX denotes length

#### Color coded leads for quick setup and verification

**Jackets**      **Connectors**      **Clamps**



16 A H leads  
TAU3 BASIC, TAU3 ADV, TAU3 PRO, TAU3 EXP



32 A X leads  
TAU3 PRO, TAU3 EXP



16 A X leads  
TAU3 BASIC, TAU3 ADV

## TAU3

# Three-phase transformer winding analyser

### SPECIFICATIONS - Valid from -20 ° to +50 °C

#### Input power

100-240 V AC, 47-63 Hz, 1200 W  
 $\pm 10$  % Mains supply voltage fluctuations overvoltage category II

#### Output power

Voltage: 3-phase switched, 1-48 V  
 Frequency: DC, 80 Hz  
 Current: 0.1 mA – 1 A at 48 V  
 Current: 0.1 mA – 10 A at 24 V

#### Regulatory

Safety IEC 61010-1:2010 + AMD1:2016  
 EMI/EMC IEC 61326-1:2012  
 RoHS2 EN50581  
 Vibe/Shock MIL-STD-810G  
 Ingress protection IP67 (in transit case)

#### Transformer testing standards

IEEE C57.152-2013  
 IEC 60076-1:2011  
 AS/NZS 6076 1:2014  
 CIGRE 445 2 011  
 GOST 3484.1-88

**Dimensions** 55.8 x 28.7 x 19 cm  
 22 x 11.3 x 7.5 in

**Weight** 15 kg 33 lbs

#### Case

Rugged case with built in wheels and handle  
 Backpack lead bag for leads and accessories

#### Internal/external data storage

Up to 10 000 sets of three-phase results internal storage  
 Transferable via USB 2.0 drive

#### Communication/control software

USB interface for PC control with custom GUI

#### Touch screen (optional)

25.6 cm 10.1 in  
 1024 x 600 resolution  
 1000 NITS

#### Printer (optional)

51 mm (2 in) thermal printer  
 Prints all measurement data displayed on GUI

#### Environmental

Operating -20 ° to 50 °C (-4 ° to 122 °F)  
 Storage -30 ° to 70 °C (-22 ° to 158 °F)  
 Relative humidity 0-90 %, non-condensing  
 Indoor and outdoor use in dry locations  
 Elevation 2000 m MAX  
 Pollution degree 2

### TTR

#### Turns ratio measurement methods

1-phase step up  
 1-phase step down

#### Turns ratio range and accuracy

Step down excitation  
 25-48 V  
 $\pm 0.10$  % 0.8 – 1000  
 $\pm 0.20$  % 1001 – 2000  
 $\pm 0.60$  % 2001 – 15000  
 $\pm 1$  % 15001 – 50000  
 1-24 V  
 $\pm 0.10$  % 0.8 – 1000  
 $\pm 0.20$  % 1001 – 2000  
 $\pm 0.60$  % 2001 – 15000

#### Excitation current resolution

Resolution 0.1 mA, 0.1 mA – 100 mA  
 1.0 mA, 101 mA – 3.5 A

#### Excitation current accuracy

$\pm 1$  % Reading,  $\pm 0.1$  mA

#### Frequency accuracy

$\pm 1$  % Reading,  $\pm 0.1$  Hz

#### Phase range

Range 0 – 360 °

#### Phase accuracy

$\pm 0.05$  °

#### Max voltage output

45 V AC peak

#### Voltage accuracy

Typical  $\pm 0.1$  % reading,  $\pm 0.1$  mV  
 Guaranteed  $\pm 0.5$  % reading

Specified accuracy for external verification only and does not impact AC tests accuracy (TTR, Magnetic Balance, SCI, FRSL, or Losses)

## TAU3

# Three-phase transformer winding analyser

### WR

#### Resistance measurement methods

1-phase wye, delta, zigzag

Dual winding excitation

#### DC open circuit

**voltage** Up to 50 V

#### DC measurement

**voltage** Up to 50 V

**Resistance accuracy**  $\pm 0.2\%$  reading,  $\pm 1\ \mu\Omega$

**Resistance resolution** 5 digits

**DC voltage accuracy** Typical:  $\pm 0.05\%$  reading,  $\pm 0.1\text{ mV}$   
Guaranteed:  $\pm 0.5\%$  reading,  $\pm 0.1\text{ mV}$

**DC current accuracy** Typical:  $\pm 0.05\%$  reading,  $\pm 0.1\text{ mA}$   
Guaranteed:  $\pm 0.5\%$  reading,  $\pm 0.1\text{ mA}$

Specified accuracy for external verification only and does not impact DC tests accuracy (Winding resistance).

#### Current and resistance ranges

Typical with 9 m (30 ft) leads

| Current | Min $\Omega$    | Max $\Omega$   |
|---------|-----------------|----------------|
| 10 A    | 1.0 $\mu\Omega$ | 1.0 $\Omega$   |
| 8 A     | 1.0 $\Omega$    | 2.0 $\Omega$   |
| 1 A     | 2.0 $\Omega$    | 20 $\Omega$    |
| 100 mA  | 1.0 $\Omega$    | 100 k $\Omega$ |

#### Dynamic resistance measurement method\*

Dynamic voltage

Dynamic current

Dynamic resistance

#### Dynamic Resistance Speed\*

Speed 20 kHz

#### Motor current measurement (optional)

9 V battery power

Measuring range: 3.0 A/30 A

Frequency range: DC to 60 Hz

Resolution:  $\pm 50\text{ mA}$  /  $\pm 100\text{ mA}$

Accuracy:  $\pm 1\%$  reading

#### Temperature probe measurement (optional)

Range:  $-20\text{ }^{\circ}\text{C}$  to  $+110\text{ }^{\circ}\text{C}$

Accuracy:  $\pm 1\%$  reading,  $\pm 1.0\text{ }^{\circ}\text{C}$

## TAU3

### Three-phase transformer winding analyser

#### ORDERING INFORMATION

| Item (Qty)                                                                                | Cat. No.     | Item (Qty) for price list            | Cat. No.      |
|-------------------------------------------------------------------------------------------|--------------|--------------------------------------|---------------|
| Three-phase transformer winding analyser                                                  | TAU3BASIC    | <b>Optional hardware accessories</b> |               |
| <b>Included Accessories</b>                                                               |              | Calibration Certification            | TAU3-CAL-CERT |
| AC Power Cords (US, EU, UK)                                                               | 1014-927     | Safety Beacon – 18 m (60 ft)         | 1004-639      |
| USB 2.0 Cable                                                                             | CA-USB       | Transit case (for instrument)        | 1014-928      |
| OLTC Tap Changer Cable                                                                    | 1011-622     | USB Printer                          | 90029-573     |
| Cable Bag – Backpack                                                                      | 2012-180     | USB Printer Paper (x48 rolls)        | 90029-573-P   |
| Ground Lead 4.5 m (15 ft)                                                                 | 4702-7       | 1:1 Test Jig                         | 2005-249      |
| USB Drive                                                                                 | 90012-878    | OLTC tap changer cable adapters      | 1011-622-A    |
| <b>Accessories required for operation</b>                                                 |              | Motor current monitor*               | 1014-929      |
| <b>Choose one lead kit</b>                                                                |              | Vibration monitor*                   | 1014-930      |
| <b>TAU3 BASIC Lead kits</b>                                                               |              | Temperature probe kit*               | 1014-931      |
| <b>16 Amp H leads with red jacket and red, yellow, blue, and white clamps (4 total)</b>   |              | TRS1+ calibration standard           | TRS1PLUS      |
| <b>16 Amp X leads with black jacket and red, yellow, blue, and white clamps (4 total)</b> |              | TOS1 calibration standard            | TOS1          |
| <b>Optional lead accessories</b>                                                          |              | <b>Optional software accessories</b> |               |
| 5 m (15 ft) H and X leads                                                                 | 2008-15KIT2  | PowerDB control                      | SW-POWERDB    |
| 9 m (30 ft) H and X leads                                                                 | 2008-30KIT2  | Custom application control           | SW-CUSTOMAPP  |
| 18 m (60 ft) H and X leads                                                                | 2008-60KIT2  | Dynamic resistance measurements*     | SW-DRM        |
| 30 m (100 ft) H and 18 m (60 ft) X leads                                                  | 2008-100KIT2 | Transformer dry out measurements*    | SW-DRYOUT     |
| <b>TAU3-BASIC 16 A H and 16 A X lead extensions</b>                                       |              | Transformer heat run measurements*   | SW-HEATRUN    |
| 9 m (30 ft) H and X extensions                                                            | 2008-30XKIT2 |                                      |               |

\*Coming 2025!